

DYNAMIC WHITE STRIP K021

Tunable White LED Light Engine

PRODUCT OVERVIEW

The Dynamic White Strip K021 is a 24VDC tunable white light engine with 24 LEDs per foot, and delivers over 690 lumens. Designed with two 0 - 10V inputs, color temperature can be adjusted from 2700K to 6500K, and brightness reduced down to 1%. The K021 can be easily daisy-chained with the integrated poke to home connectors to form light engines up to 20 feet in length. The flexibility of the DynamicWhiteStrip adapts to serve a wide variety of needs and applications where the versatility of tunable white light is required.

FEATURES

- ✓ Designed and manufactured in America
- ✓ DC input power up to 28VDC
- ✓ Customization of color temperature
- ✓ Dimmable down to 1%
- ✓ Daisy-chain capable up to twenty foot lengths
- ✓ Integrated reverse polarity protection



Product		K021-382765F60		
General	Shape	Rectangle		
	LED Count	24		
	Field Cut	No		
	Daisy Chain Limit	Up to 20 Feet		
	Lumens	690 to 700		
	Beam Angle	120°		
	Optics	None		
	CCT	2700K to 6500K		
Electrical	CRI	80 min		
	Input Voltage	19V _{DC} min	24V _{DC} typ	28V _{DC} max
	Wattage	4.6 W typ	5.8 W typ	6.7 W typ
	Power Consumption	4.6 W/ft	5.8 W/ft	6.7 W/ft
Control	Efficacy	150 lm/W	120 lm/W	105 lm/W
	Dimming	Down to 1%		
	Color	0-10V _{DC}		
Environment	Brightness	0-10V _{DC}		
	Operating Temp	-20 to 80° C		
	Storage Temp	-40 to 125° C		
Mechanical	Connection	Poke-Home 18-24 AWG, Max conductor dia 1.2mm		
	Mounting	Double Sided Adhesive		
	Dimension	12.0 x 0.95 x 0.26 in (304.8 x 24.13 x 6.6 mm)		
	Weight	0.90oz (28g)		
Regulatory	Compliance	RoHS		
	Warranty	1 Year		

* All specifications subject to change without prior notification.


DYNAMIC WHITE STRIP K021

Tunable White LED Light Engine


Ordering Information

Product ID	LED Options	CRI	CCT		Controls	Current Drive
			Lo	Hi		
K021	3 Step 5 Step	80+	2700K	2700K	Full Control	60mA

Mechanical Drawings

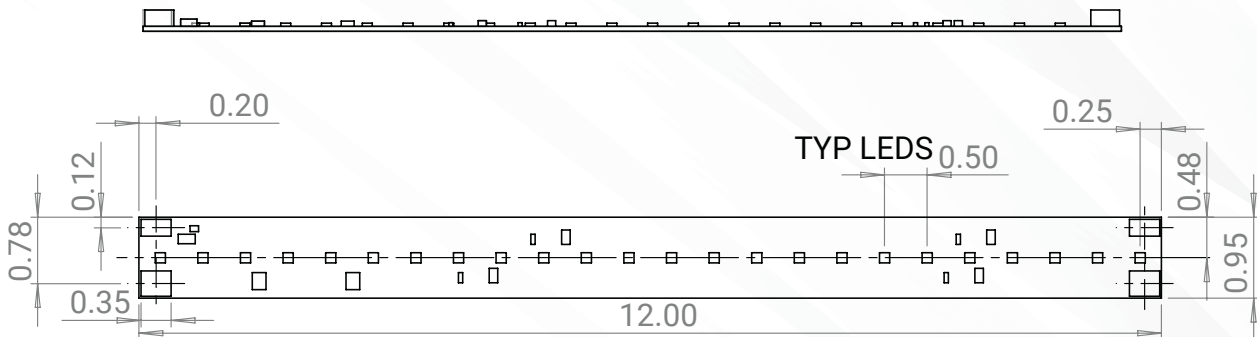

TYP FOR CONNECTORS

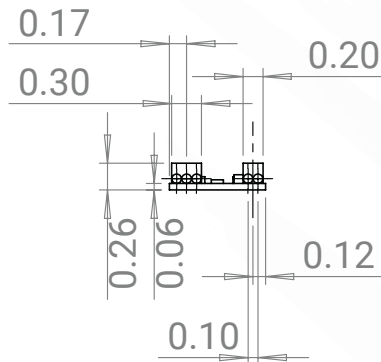

TYP HOLE SPACING