

## N006-12V RECTIBLOCK

### 12Vac to 12Vdc Converter

### PRODUCT DESCRIPTION

The LUXdrive™ N006 is a constant voltage regulator that converts 12Vac to 12Vdc. This is an excellent product for use with landscape lighting where 12Vac is utilized. Great for use with LED strip lighting and walkway lighting.



Product		N006-12V		
	Shape	Rectangular With Mounting Tabs		
General	Input Connection	Brown (V~) / Brown(V~)		
	Output Connection	Red (V+) / Black (V-)		
Electrical	Input Voltage	11Vac (Low)	12Vac (Typical)	14Vac (High)
	Output Voltage	11Vdc (Low)	12.5Vdc (Typical)	13Vdc (High)
	Output Current	-	-	3A
Environment	Operating Temp	-20 to 80° C		
	Storage Temp	-40 to 80° C		
Mechanical	Connection	Wire		
	Dimension	2.29" x 1.57" 0.87"		
	Weight	1.48 oz (42g)		
Regulatory	Compliance	RoHS 3 (EU 2015/863)		
	Warranty	<a href="#">LEDdynamics Warranty</a>		

\* All specifications subject to change without prior notification.

### TYPICAL APPLICATIONS

- » LANDSCAPE LIGHTING
- » WALKWAY LIGHTING
- » GENERAL LIGHTING
- » LOW VOLTAGE RECTIFICATION




## N006-12V RECTIBLOCK 12Vac to 12Vdc Converter

### Ordering Information

PRODUCT FAMILY	PART NUMBER	DESCRIPTION
Constant Voltage Power Converter	N006-12V	12Vac To 12Vdc Converter

### Mechanical

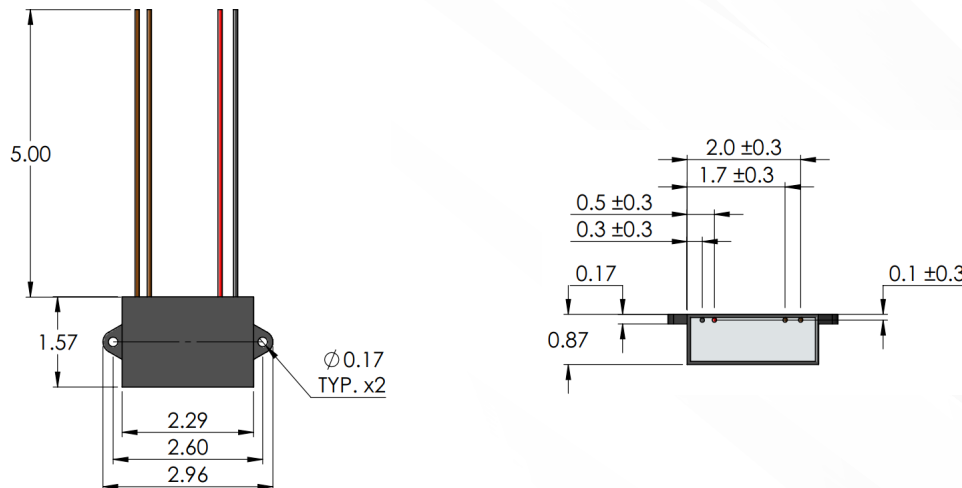

1. Dimensions in inches
2. Tolerance: 0.xx" = +0.015"

### Wiring Example

